
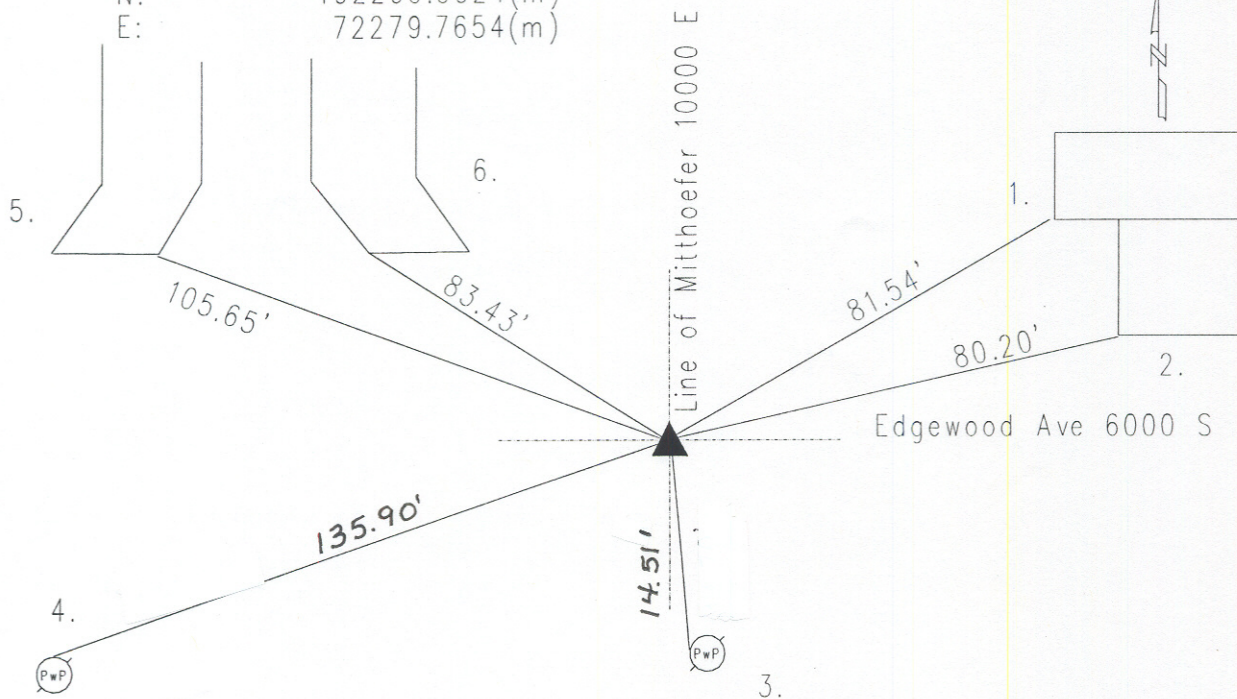


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 9 TOWNSHIP 14 RANGE 5  
DATE: ~~10-15-02~~ 1-17-07  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 7-22-98

IN. S.P.C. E ZONE NAD '83  
NAME: 14050901  
N: 492290.0924(m)  
E: 72279.7654(m)

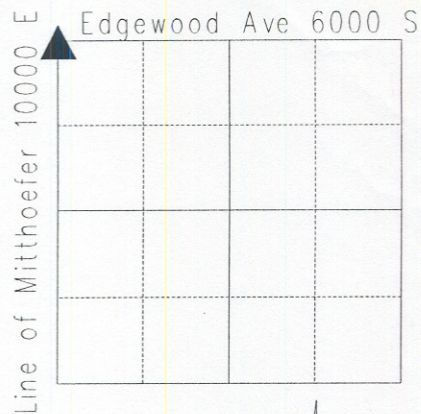

Original post set 1821 by Hendricks with witness: 8" beech S 17 E 11 links; 18" ash N 10 E 20 links per Marion County Atlas pg. 13. 5-8-57 NE corner 8-14-5 called stone. 4-10-70 called stone 2" down. Excavated 9-7-88 railroad spike found at surface .10' N and .40' E of stone found 12" down. Harrison set. 10-29-89. Re-tied 6-21-93. Re-tied 7-22-98. Re-tied 10-15-02 by Wilcoxon. 14050901

REF.	DISTANCE	DESCRIPTION
1.	81.54'	SW corner of ADDRESS 10002
2.	80.20'	SW top concrete slab porch ADDRESS 10002
3.	14.51'	Mag nail w/brass washer W PwP#36-741 B 3"up
4.	135.90'	Mag w/bw nail N PwP#35-741 B 6"up
5.	105.65'	SE corner of brick
6.	83.43'	SW corner brick